

Pedestals & Timber Decking



Our pedestal series can be used for all kind of deckings: timber decking (square timber, wood tiles, wood slabs, etc.), slabs (stone, marble, granite, flag, concrete, etc.), grid (drainage channels, outlets, grid plates) and temporary deckings (dance floors, fountains, exhibition booths, terraces, industrial floors, etc.). The height adjustable PLV50/75 used together with our other pedestals can reach heights up to 600 mm.



Fig. 3: Pedestals PP155/15, PP155/45 stacked, combined with height adjustable PLV50/75. Project MPI Tübingen.

Fig. 4: Height adjustable PLV50/75 with several ZSt65/100, combined to flexible heights from 135 up to 550 mm.



Fig. 5: 2 PP155/45 stacked between 2 PLV 50/75, Project MPI Tübingen.



Fig. 6: EnBW, roof terrace, combination timber&stone, underconstruction PLV50/75 and ZSt65/100, 135-170 mm.

Pedestals & Slab Decking

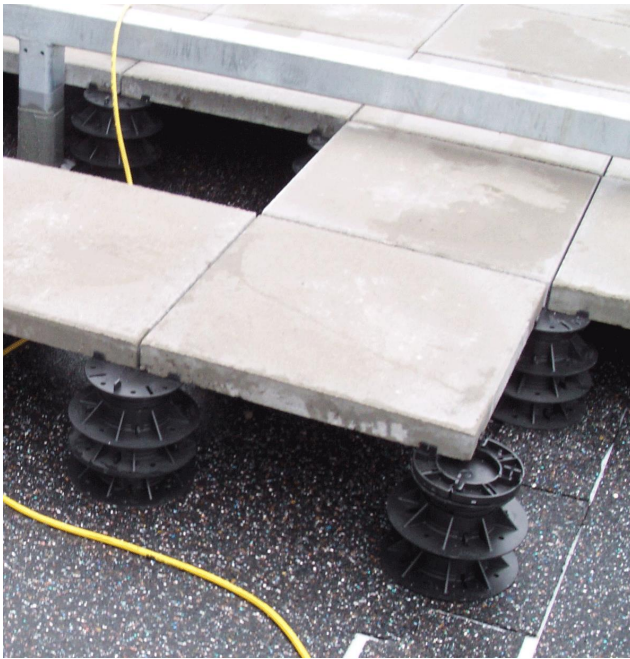


Fig. 7: Height adjustable PLV50/75 combined with PP155/15, Project „euro-gate“ Hamburg.



Fig. 8: Project Mills United, Recklinghausen PLV50/75 combined with ZSt65/100, 135-170 mm.



Fig. 9: PLV50/75 and AS15/3 Project „euro-gate“ Hamburg.

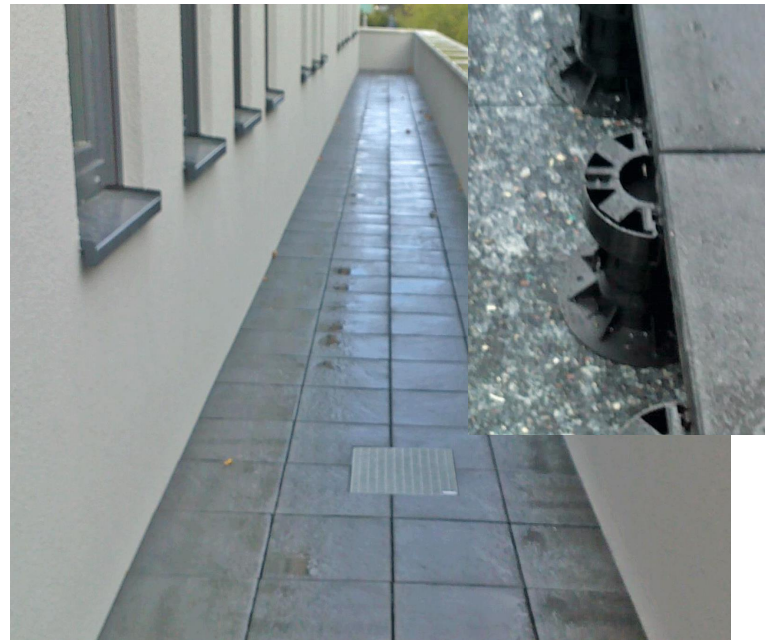


Fig. 10: Project GIG Hohenzollernring, Münster PLV50/75, ZSt65/100, PP155/15 and AS15/3.

Pedestals & Grid Decking



Fig. 11: Height adjustable PLV50/75 under grid plates, 50-75 mm.

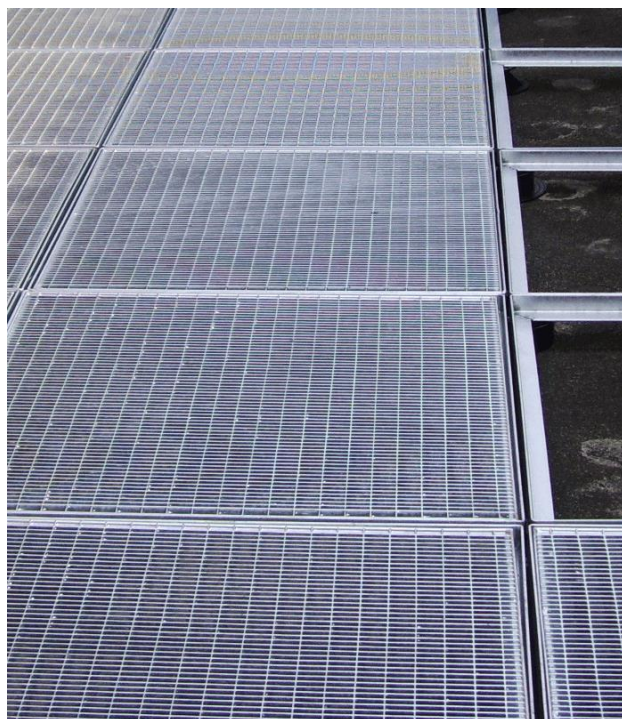


Fig. 12: PLV50/75 combined with ZSt65/100, supporting grid, 135-170 mm.

Pedestal Combinations

Further combinations you will find on the following pages,
or alternative on our webpage under www.euro-system-ec.com

1 PLV50/75
1 PP155/15
65-85 mm

1 PLV50/75
1 PP155/45
90-115 mm

2 PLV50/75
100-140 mm

1 PLV50/75
1 ZSt65/100
135-170 mm

